

4MP 33x Starlight Network PTZ Camera



Functions:

- 1/2.8" Progressive Scan 4MP CMOS
- 5.5-180mm;33x optical zoom
- Starlight technology
- Smart Features
- IR distance up to 60 m
- IP66

Camera	
Image Sensor	1/2.8" Progressive Scan 4MP CMOS
Min. Illumination	Color:0.001 Lux @(F1.5,AGC ON);Black:0.0005Lux @(F1.5,AGC ON);
Shutter Time	1/25 to 1/100,000s
Day & Night	IR Cut Filter
Lens	
Focal Length	5.5-180mm;33x optical zoom
Digital zoom	16x digital zoom
Aperture Range	F1.5-F4.0
Field of View	H: 57°(wide)-2.3° (tele);V: 32.6°(wide)-1.3° (tele)
Working Distance	100mm-1000mm (wide-tele)
Zoom Speed	Approx. 3.5s (optical lens, wide-tele)
Compression	
Video Compression	H.265 / H.264 / MJPEG
Audio Compression	G.711a/G.711u/G.722.1/G.726/MP2L2/AAC/PCM
Image	
Resolution	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720); 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)
Image Setting	Corridor mode, saturation, brightness, contrast and sharpness can be adjusted by client or browser
BLC	Support
Exposure Mode	Automatic exposure/aperture priority/shutter priority/manual exposure
Focus Control	Auto focus/one-time focus/manual focus
Area Exposure/Focus	Support
Defog	Support
EIS	Support

Portable Series | PTZ3C433-G

Day & Night	Auto(ICR) / Color / B/W
3D Noise Reduction	Support
Image overlay	Support BMP 24 bit image overlay, optional region
ROI	ROI supports one fixed region for each three-bit stream
Network	
Network Storage	Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 128 GB; NAS (NFS, SMB/ CIFS)
Protocol	ONVIF(PROFILE S,PROFILE G) ,GB28181-2016
Battery	
Working time	9 Hours
PTZ	
Pan Range	360° (endless)
Pan Speed	0.05°~80° /s
Tilt Range	-25°~90°
Tilt Speed	0.05°~60°/s
Presets	255
Patrol Scan	6 patrols, up to 18 presets for each patrol
Pattern Scan	4 , with the total recording time not less than 10 minutes
Power off Memory	Support
Infrared	
IR Distance	Up to 60m
IR Intensity	Automatically adjusted, depending on the zoom ratio
Port	
Audio I/O	NA
Alarm I/O	NA
General	
Power	DC 12~24V,45W(Max)
Working Temperature	-40°C~60°C
Humidity	Humidity 90% or less
Protection Level	Ip66, TVS 4000V Lightning protection, surge protection
Dimension	φ147 X 255
Mount Option	Vehicle mounting, Ceiling/tripod Mounting
Weight	3kg

Portable Series | PTZ3C433-G

Accessories

Included:



AC24V/2.2A Power Adapter



970 Damping Bracket




Cable



Tripod

Dimensions:

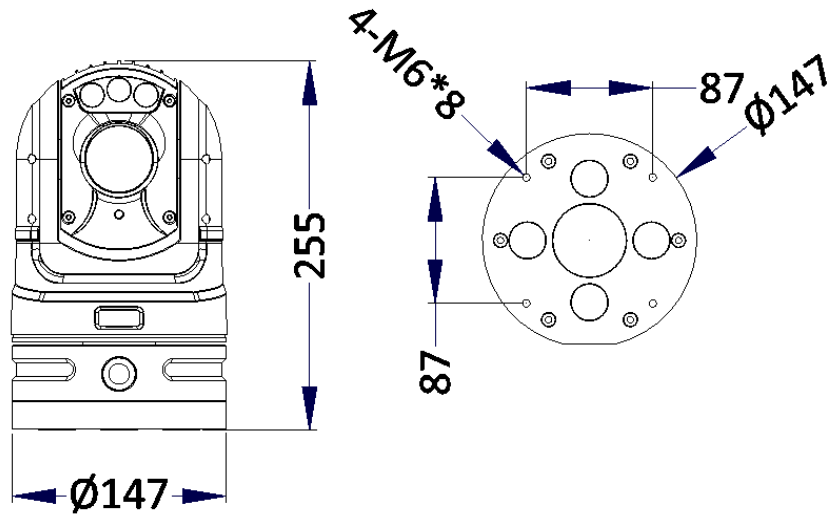

This datasheet is subject to change without prior notice. Please contact us to get the latest datasheet.