

2MP 26x Starlight Network PTZ Camera



Functions:

- 1/2.8" Progressive Scan 2MP CMOS
- 5-130mm, 26x Optical Zoom
- Starlight technology
- IR distance up to 120 m
- IP66

| Camera | |
|---------------------------------------|---|
| Image Sensor | 1/2.8" Progressive Scan 2MP CMOS |
| Minimum Illumination | Color:0.001 Lux @ (F1.5,AGC ON); B/W:0.0005Lux @ (F1.5,AGC ON) |
| Shutter | 1/25s to 1/100,000s; Supports delayed shutter |
| Aperture | DC drive |
| Day/Night Switch | ICR cut filter |
| Digital zoom | 16x |
| Lens | |
| Focal Length | 5-130mm, 26x Optical Zoom |
| Aperture Range | F1.5-F3.8 |
| Field of View | H: 56.9-2.9°(wide-tele) V: 32.2-1.6°(wide-tele) |
| Minimum Working Distance | 100mm-1000mm (wide-tele) |
| Zoom Speed | Approximately 3.5s (optical, wide-tele) |
| Compression Standard | |
| Video Compression | H.265 / H.264 / MJPEG |
| H.265 Type | Main Profile |
| H.264 Type | BaseLine Profile / Main Profile / High Profile |
| Video Bitrate | 32 Kbps~16Mbps |
| Audio Compression | G.711a/G.711u/G.722.1/G.726/MP2L2/AAC/PCM |
| Audio Bitrate | 64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-192Kbps(MP2L2)/16-64Kbps(AAC) |
| Image (Maximum Resolution: 1920*1080) | |
| Main Stream | 50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720); 60Hz: 30fps(1920 × 1080, 1280 × 960, 1280 × 720) |
| Third Stream | 50Hz: 25fps (704 x 576); 60Hz: 30fps (704 x 576) |

Pro Series | SD5C226-H

| | |
|------------------------|--|
| Image Settings | Saturation, Brightness, Contrast and Sharpness can be adjusted via the client-side or browse |
| BLC | Support |
| Exposure Mode | AE / Aperture Priority / Shutter Priority / Manual Exposure |
| Focus Mode | Auto Focus / One Focus / Manual Focus / Semi-Auto Focus |
| Area Exposure / Focus | Support |
| Defog | Support |
| Image Stabilization | Support |
| Day/Night Switch | Automatic, manual, timing, alarm trigger |
| 3D Noise Reduction | Support |
| Picture Overlay Switch | Support BMP 24-bit image overlay, customizable area |
| Region of Interest | Support three streams and four fixed areas |
| Network | |
| Storage Function | Support Micro SD / SDHC / SDXC card (256G) offline local storage, NAS (NFS, SMB / CIFS support) |
| Protocols | TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,RTP,RTSP,RTCP,NTP,SMTP,SNMP,IPv6 |
| Interface Protocol | ONVIF(PROFILE S,PROFILE G) |
| Smart Features | |
| Smart Detection | Cross-border detection, area intrusion detection, entering /leaving area detection, hovering detection, personnel gathering detection, fast motion detection, parking detection / take detection, scene change detection, audio detection, virtual focus detection, face detection |
| PTZ | |
| Pan Range | 360° endless |
| Pan Speed | 0.05°~120° /s |
| Tilt Range | -3°~93° |
| Tilt Speed | 0.05°~120°/s |
| Number of Preset | 255 |
| Patrol | 6 patrols, up to 18 presets per patrol |
| Pattern | 4 , with the total recording time not less than 10 mins |
| Power loss recovery | Support |
| Infrared | |
| IR distance | Up to 120m |
| IR intensity | Automatically adjusted, depending on the zoom ratio |
| Port | |
| Audio I/O | 1 input,1 output(optical) |
| Alarm I/O | 1 input,1 output(optical) |

Pro Series | SD5C226-H

| General | |
|---------------------|--|
| Power | AC 24V, 36W(Max) |
| Working temperature | -40°C -60°C |
| Humidity | 90% or less |
| Protection level | Ip66, TVS 4000V Lightning protection, surge protection |
| Mount option | Wall Mounting, Ceiling Mounting |
| Weight | 3.5kg |

Accessories

Included:



Wall Mount Bracket



AC24V/2.2A Power Adapter

Optional:




Ceiling Mounting Bracket



Mount Adapter

Dimensions

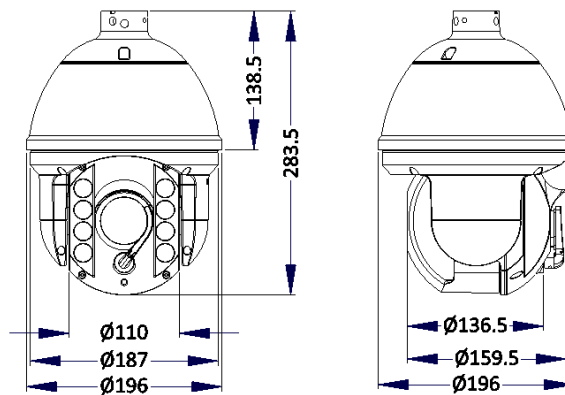

This datasheet is subject to change without prior notice. Please contact us to get the latest datasheet.